




Auto-Lift Fryer

IF3500S-AL

Smart Frying Starts Here.



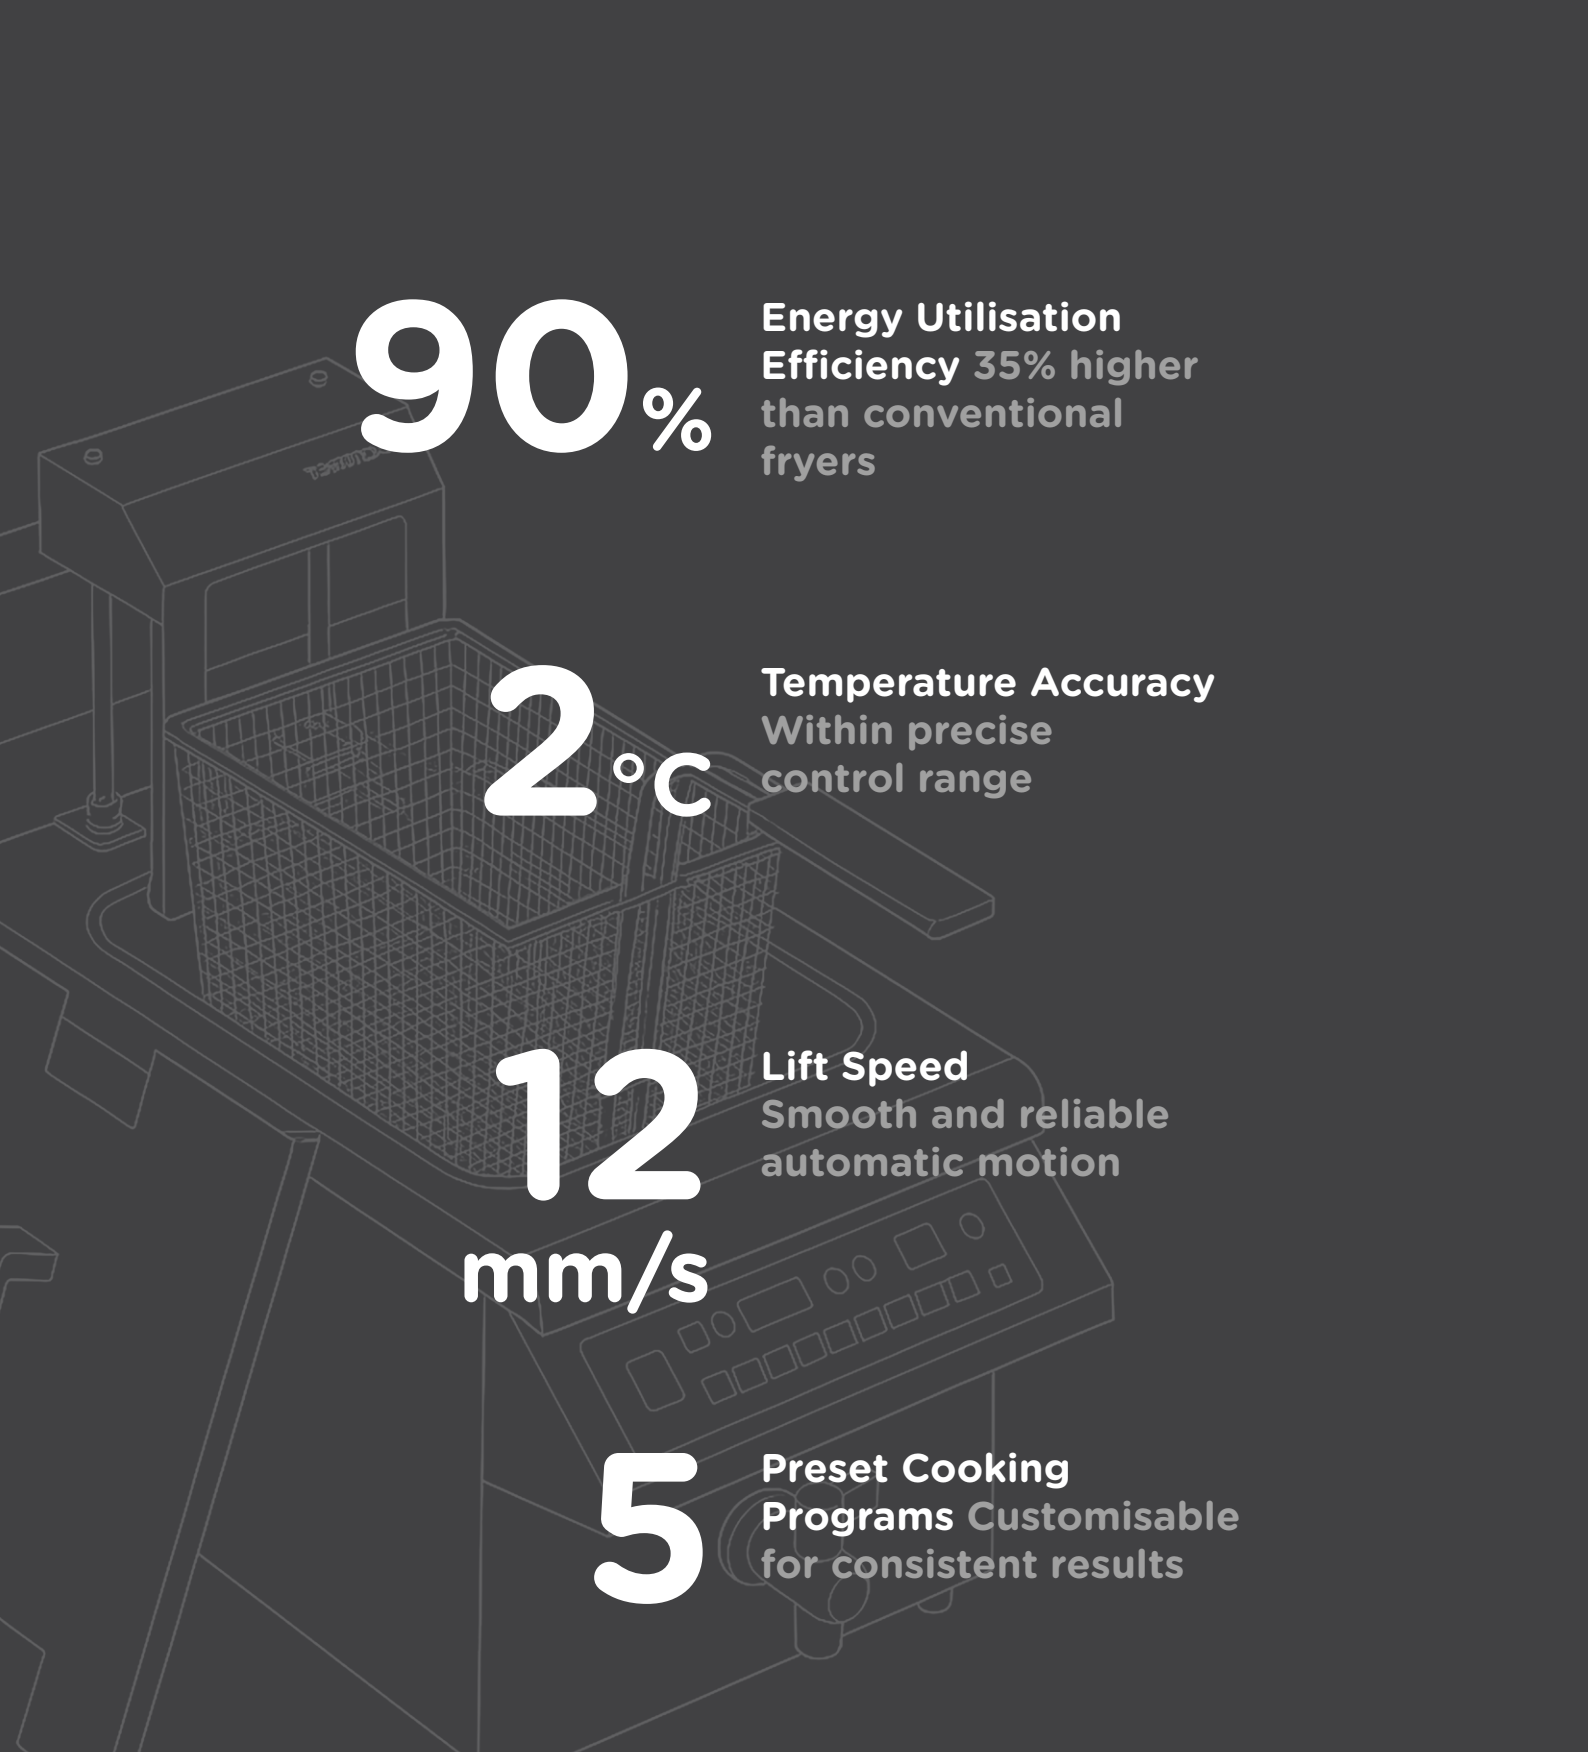

90%

Energy Utilisation
Efficiency 35% higher
than conventional
fryers

2°C

Temperature Accuracy
Within precise
control range

12 mm/s

Lift Speed
Smooth and reliable
automatic motion

5

Preset Cooking
Programs Customisable
for consistent results

Auto-Lift System

Automatically
lifts baskets for
perfect timing
and consistency.

Fast Induction Heating

Heats oil 35%
faster with 90%
energy efficiency.

Touch Control Precision

±2 °C accuracy
for reliable temp.
control.

Cold Zone Design

Keeps oil cleaner,
flavours pure, and
impurities out.

Custom Presets

Save up to 5
custom cooking
modes.




Hands-Free. Hassle-Free.

Auto-lift for
consistent
cooking with
hands-free
timing.

Save up to 5
custom cooking
modes.

Cold Zone
prevents residue
build-up,
extending oil life.

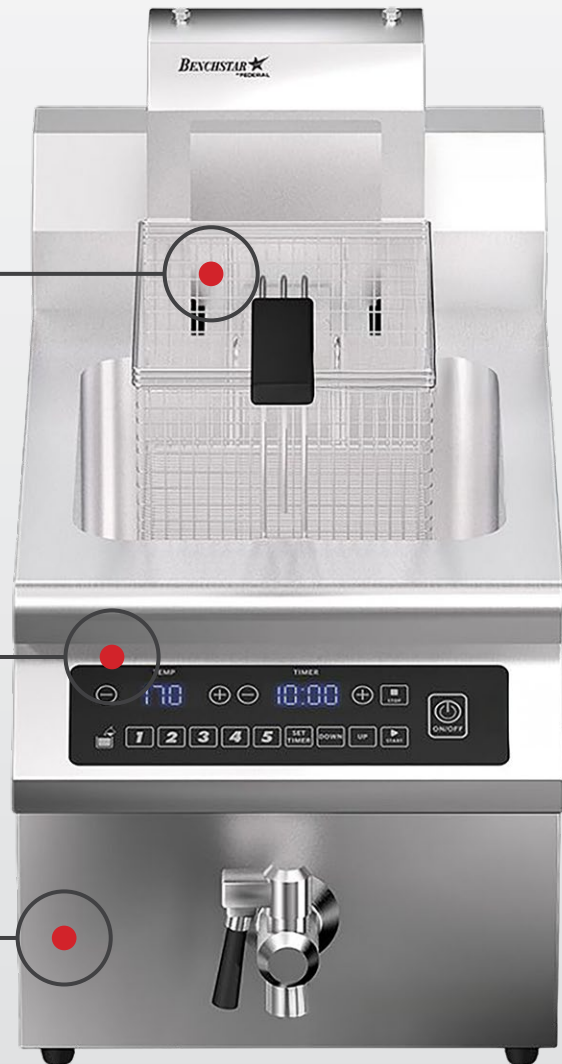

The Benchstar Auto-Lift Induction Fryer Series combines intelligent automation with precision induction technology for faster heat-up times, consistent cooking, and superior energy efficiency. Its automatic lift system removes food at exactly the right time, while the advanced touchscreen delivers ultra-accurate temperature control and programmable presets.

Designed for performance and reliability, it keeps oil cleaner, reduces labour, and ensures consistent, high-quality frying in every batch.



Solutions for Every Setup.

The Benchstar range is engineered for versatility across today's fast-paced commercial kitchens — from high-volume restaurants and cafés to hotel buffets, quick-service venues, and institutional catering. Designed to deliver consistent performance in compact or large-scale setups, every Benchstar appliance combines precision control, rapid response, and durable stainless-steel construction.

Whether it's induction fryers, cooktops, griddles, or pasta cookers, the range adapts to diverse kitchen environments, offering configurations to suit every workflow, cooking style, and energy demand.

**Single Tank
Auto Lift Fryer**
IF3500S-AL



**Dual Tank
Auto Lift Fryer**
IF7000D-AL



Model	Tank Capacity (L)	Dimensions (WxDxH mm)	Basket (WxDxH mm)	Gross Capacity (L)	Weight (kg)	Temp. Range	Voltage (V)	Power (kW/A)
IF3500S-AL	8	320x600x400	190x230x140	12.4	16.5	60 to 190°C	240	3.5/15
IF7000D-AL	8*2	625x600x400	190x230x140	24.8	26.5	60 to 190°C	240	3.5/15*2